F Т 1230 (FK-5-1-12)

Introduction

FOT-1230 (FK-5-1-12), full chemical name Dodecafluoro-2-methylpentan-3-one, is a sustainable substitute for Halon 1301 with excellent fire extinguishing performance and typical safety & environmental characters of:

- \checkmark Clean and do not leave residue.
- ✓ Electrically nonconductive.
- ✓ Safe for people and animal.
- $\checkmark~$ Zero ODP and low GWP.



FOT-1230 (FK-5-1-12) material specification is in compliance with NFPA 2001 (Standard on clean agent fire extinguishing systems) and ISO 14520 (Gaseous fire extinguishing systems).

Properties

Chemical Name	FK-5-1-12
Empirical Formula	$CF_3CF_2C(O)CF(CF_3)_2$
CAS Number	756-13-8
Molecular Weight	316.04
Boiling Point	49°C
Freezing Point	-108°C
Viscosity Liquid (25°C)	0.524Cp
Vapor Pressure (25°C)	40.4KPa
Extinguish Concentration (Cup)	3.5%
NOAEL (V/V)	10%
LOAEL (V/V)	>10 %
LC50 (V/V)	>10%
Ozone Depleting Potential	0
GWP	1





Unit 3 Merchant, Evegate Business park, Ashford, Kent, England, TN25 6SX

www.fotfirecontrol.co.uk sales@fotfirecontrol.co.uk. +44 333 2244 360

Quality Control

FST1230 (FK-5-1-12)

✓ Four times of UL follow-up service every year.

- \checkmark All performance is strict to act as ISO9001:2008.
- Our quality control program is supported by

advanced analytical facilities, which help to ensure that all raw materials, in-process materials and finished products are quality controlled at all stages.


Filling Curve

Packing

Plastic-lined Steel Drum.

Application

Isometric diagram of FK-5-1-12 pressurized to 25 bar, gauge at 20°C.

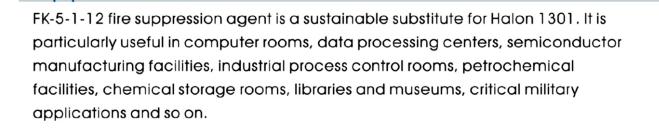

120

100

80

60 40

20

0↑ -20

20

Ó

40

Temperature (°C)

60

Gauge pressure (bar)

FOR YOUR LIFE TREASURE AND NATURE

Unit 3 Merchant, Evegate Business park, Ashford, Kent, England, TN25 6SX







1480 kg/m3

1420 kg/m³

1050 kg/m³

100

80



