

FOT4M

Conventional Fire Alarm Panel

Description

FOT4M is a conventional fire alarm panel certificated by EN54-2/4, providing 4 fixed zones. Up to 20 (32 SensoFOT Series) fire detectors can be connected to every fire zone. Unlimited number of call points can be connected to every of the fire zones.

FOT4M is situated in a metal box with compact size. The panel is easy for installation and maintenance and provides user-friendly daily operation. The panel is suitable for residential, small and middle office applications with protected area up to 2200m².


The panel is available in different language versions for the front panel.



1293-CPD-0173

Technical and Environmental Specifications

Main Power Supply	~230 ± 10%
Frequency	50/ 60Hz
Back-up Power Supply	1 battery, 12V/ 7Ah
Power availability	0.7A
Main power supply fail consumption	50mA
Outputs (sounder circuits on the control PCB module)	2; 24V/ 0.3A fuse
Output, FAULT Relay	1; 3A@120VAC; 3A@60VDC
Output, FIRE Relay	1; 3A@120VAC; 3A@60VDC
Auxiliary output	24VDC/ 0.3A fuse
Fixed zones	4
Detectors per zone / max number of detectors	32/ 128
Multi language front panels	YES
Operating temperature	0 °C to +40 °C
Relative humidity resistance	(93 ± 3)% @ 40 °C
Weight (without battery)	~3.5kg
Dimensions of the metal box	320x220x80mm

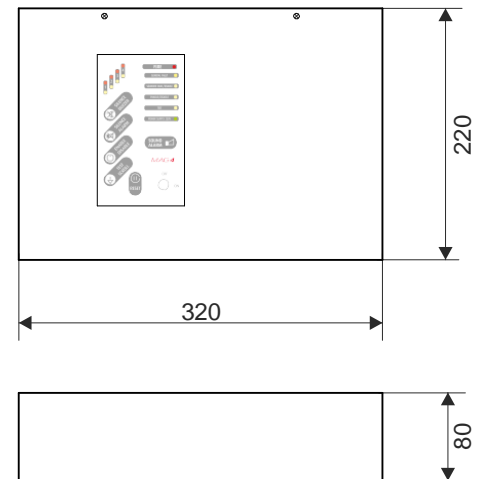

Compatible Product Range

- SensoFOT Series - Conventional detectors
- SF105, SF110, SF200, SF300 - Conventional sounders

FOT4M

Conventional Fire Alarm Panel

● Packing Information

- **Single packing box** - 1 unit FOT4M Fire Alarm Panel, dimensions 330x225x84mm
 - **Carton packing box** - 5 units FOT4M Fire Alarm Panel, dimensions 520x250x367mm
-

● Available Languages

- English
- German
- Portugal
- Estonian
- Italian
- Dutch
- French
- Finnish
- Bulgarian
- Turkish
- Spanish
- Hebrew